


**SYSTEM FEATURES AND BENEFITS**

A floating sports floor system with high resiliency and uniformity, consisting in general of a vapor barrier, NeoShok resilient pads, wood subflooring, maple flooring, sanding, sealers, finishes, game lines and wall base.

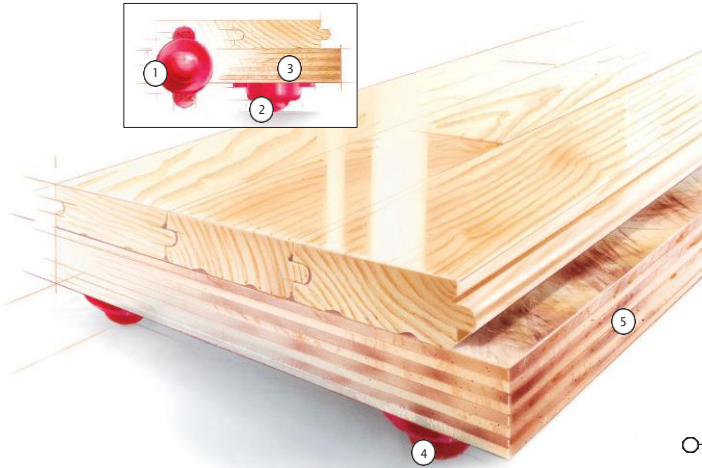


- ① Two-Stage NeoShok Pad
- ② First stage responsive to light loads
- ③ Second stage responsive to aggressive loads
- ④ Quick response contact point and excellent resilient load performance
- ⑤ Two layers of 15/32" (12 mm) APA rated plywood subfloor


**SPECIFICATIONS**

<b>MANUFACTURING</b>	<b>ISO 9001:2000</b> CERTIFIED
<b>U. S. PAT ENT #</b>	4,879,857
<b>SYSTEM TYPE</b>	Floating System
<b>ANCHOR AGE</b>	No concrete attachment
<b>SUBFL OR CONSTRUCTION</b>	Plywood Panel
<b>RESILIENCE</b>	Polyurethane NeoShok Pads
<b>SLAB DEPRESSION</b>	25/32" (20 mm) flooring - 2 1/2" (64 mm) 33/32" (26 mm) flooring - 2 3/4" (70 mm)
<b>TESTING LABORATORY</b>	United States Sports Surfacing Laboratory
<b>CERTIFIED TESTING</b>	Laboratory test equipment calibrated and certified through the ISSS
<b>GREEN STATUS</b>	Managed forests, certification available

**WALL BASE DETAIL**

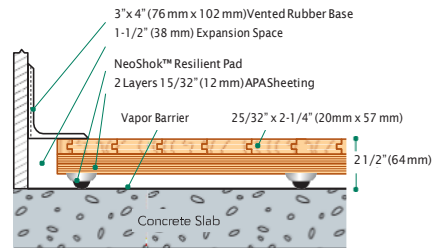

**THRESHOLD DETAIL (optional accessory)**

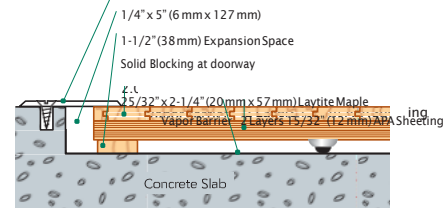

**EQUIPMENT DETAIL (optional accessory)**

